

Data Sheet

ZI Haneboesch L-4562 Differdange LUXEMBOURG Phone : +352 58 22 82 1 Fax : +352 58 49 35 E-mail : sales@airtech.lu Website : www.airtech.lu



Very light weight non-woven polyester breather/ bleeder

DESCRIPTION

Airweave® S is a thin breather with good elongation and can be used at pressures up 2 bars. It works as a bleeder under any pressure.

BENEFITS


- Very light weight for controlled resin bleed.
- Can stretch over simple shapes for easier application.
- Can be used for toolside breather applications.

TECHNICAL DATA

Fibre type	Polyester
Colour	White
Weight (approx.)	102 g/m ²
Maximum use temperature	204°C
Fire retardant	N/A
Shelf life	Unlimited when stored in original packaging at 22°C

SIZES

Width	Length	Packaging
142 cm (56 inches)	137 m (150 yards)	1 roll

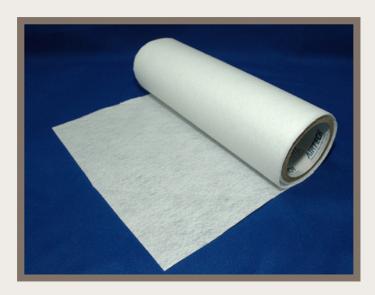

NOTES

- Material can be slit in special widths upon request (1 standard roll as minimum order quantity).
- The maximum use temperature is dependent upon the duration at maximum temperature and is process specific, Airtech recommends testing prior to use.

Last updated : 2015-08-10

Catalogue position : Breathers & Bleeders

As the conditions or methods of use, including storage, are beyond our control, Airtech Europe does not assume any responsibility for the performance of this material for any particular use. The material is sold "as is". Airtech Europe disclaims, and buyer waives, any and all implied warranties, including without limitation the implied warranties of merchantability and of fitness for particular use. The information contained herein represents typical properties and should not be used for specification purposes. This translation is provided for your convenience only. The official language is English and the official law is Luxembourg.