

Data Sheet

FLOWRUNNER KF160

Mesh wrapped spiral resin feed

DESCRIPTION


FlowRunner KF160 is a sewn tubular Knitflow 160 mesh with 1/2" (12 mm) or 3/4" (19 mm) spiral tube inserted for resin infusion applications.

TECHNICAL DATA

Material type	HDPE
Colour	Orange
Configuration of net	Knitted
Maximum use temperature	250°F (121°C)
Mesh weight	4.7 oz/yd ² (160 g/m ²)

SIZES

Product	Spiral	Width	Length
FlowRunner KF160-12	1/2 inch (12 mm)	4 inches (100 mm)	82 feet (25 m)
FlowRunner KF160-19	3/4 inch (19 mm)	4 inches (100 mm)	82 feet (25 m)

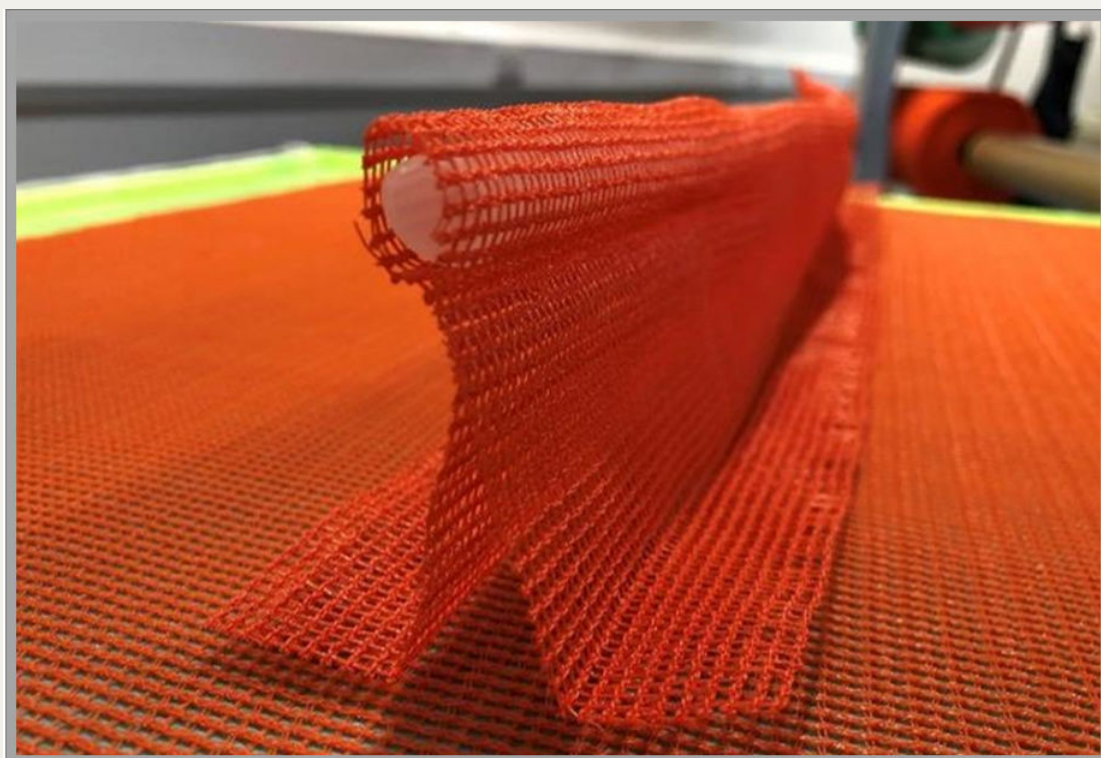

NOTES

- The FlowRunner KF160 is sold with spiral tube inserted.
- The maximum use temperature is dependent upon the duration at maximum temperature and is process specific, Airtech recommends testing prior to use.