AIRTECH EUROPE Sarl

ZI Haneboesch
L-4562 Differdange
LUXEMBOURG

Phone : +352 58 22 82 1
Fax : +352 58 49 35

E-mail : sales@airtech.lu
Website : www.airtech.lu

Data Sheet

GS-213

Industry standard vacuum bag sealant tape for metal and composite tools

DESCRIPTION

GS-213 is recognized worldwide as the work horse for the composites and bonding industries. It has excellent tack, great clean-up, and is usable up to 204°C.

BENEFITS


- Excellent tack level, so vacuum bagging is easier and safer.
- Excellent clean up reduces cost of tool cleaning.
- Approved on aerospace specifications worldwide.

TECHNICAL DATA

Colour	Off-white
Base material	Synthetic rubber
Maximum use temperature	204°C
Shelf life	12 months from date of manufacture
Storage conditions	Tape must be stored flat in original packaging at 22°C Do not refrigerate

SIZES

Dimensions	Packaging
3 mm x 12 mm x 7,5 m (1/8 inch x 1/2 inch x 25 feet)	40 rolls per case
3 mm x 19 mm x 7,5 m (1/8 inch x 3/4 inch x 25 feet)	28 rolls per case

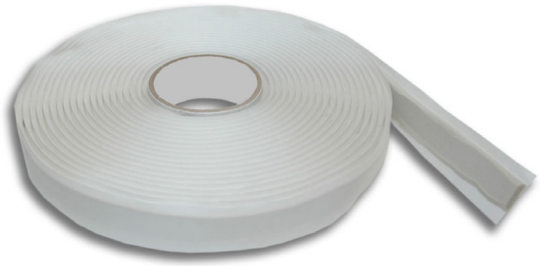

NOTES

- For clean removal, it is recommended to strip the tape from the mould surface once it has cooled down to room temperature.
- The maximum use temperature is dependent upon the duration at maximum temperature and is process specific, Airtech recommends testing prior to use.

Last updated : 2015-08-24

Catalogue position : Vacuum bag sealant tapes

As the conditions or methods of use, including storage, are beyond our control, Airtech Europe does not assume any responsibility for the performance of this material for any particular use. The material is sold "as is". Airtech Europe disclaims, and buyer waives, any and all implied warranties, including without limitation the implied warranties of merchantability and of fitness for particular use. The information contained herein represents typical properties and should not be used for specification purposes. This translation is provided for your convenience only. The official language is English and the official law is Luxembourg.