AIRTECH EUROPE Sarl
18, ZI Haneboesch
L-4562 Differdange
LUXEMBOURG
Phone : +352 58 22 82 1
Fax : +352 58 49 35
E-mail : sales@airtech.lu
Website : www.airtech.lu

Data Sheet

INFUSION TUBING CONNECTORS & VALVES

Infusion tube fittings

DESCRIPTION

Various infusion tube fittings are available to connect tubes and valves to control resin flow.

TECHNICAL DATA

Nylon fittings


Material type	Nylon
Maximum use temperature	180°C
Colour	Translucent

Infusion valve

Material type	Polypropylene
Maximum use temperature	121°C
Colour	Black

SIZES

Connector type	Part Name	Works with:
Nylon barb "T" fittings	NTF38	3/8" I.D. tubing
	NTF12	1/2" I.D. tubing
	NTF58	5/8" I.D. tubing
Nylon barb elbow fittings	NEF38	3/8" I.D. tubing
	NEF12	1/2" I.D. tubing
	NEF58	5/8" I.D. tubing
Nylon barb coupling fittings	NCF38	3/8" I.D. tubing
	NCF12	1/2" I.D. tubing
	NCF58	5/8" I.D. tubing
Infusion Valve	InfuValve	3/8" I.D. tubing

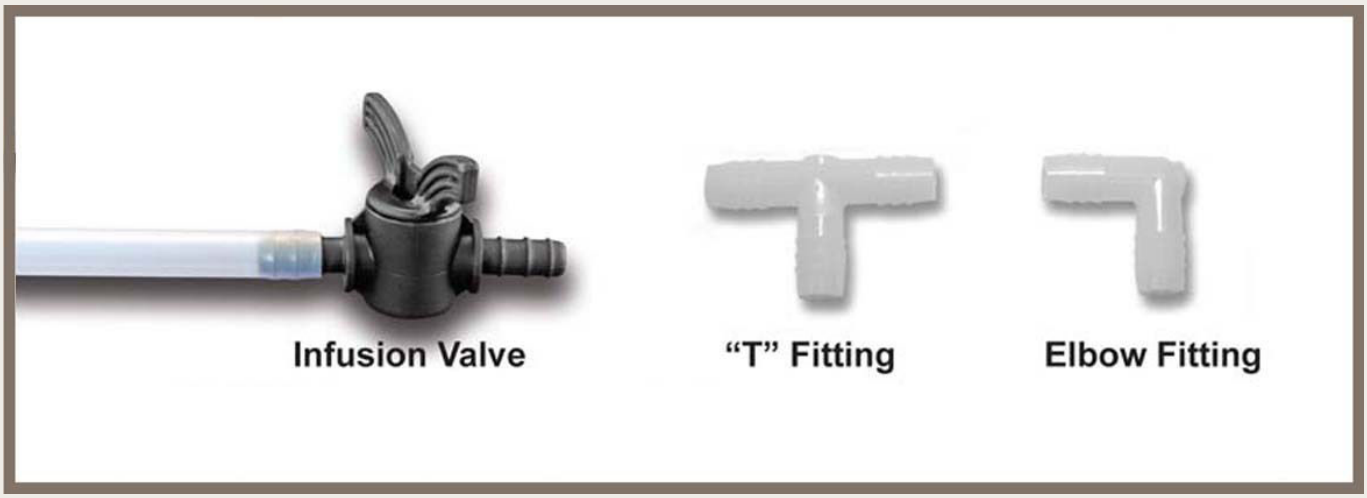

NOTES

- The maximum use temperature is dependent upon the duration at maximum temperature and is process specific, Airtech recommends testing prior to use.

Last updated : 2021-03-23

Catalogue position : Resin infusion products

As the conditions or methods of use, including storage, are beyond our control, Airtech Europe does not assume any responsibility for the performance of this material for any particular use. The material is sold "as is". Airtech Europe disclaims, and buyer waives, any and all implied warranties, including without limitation the implied warranties of merchantability and of fitness for particular use. The information contained herein represents typical properties and should not be used for specification purposes. This translation is provided for your convenience only. The official language is English and the official law is Luxembourg.