AIRTECH ASIA LTD

No. 161 of Anyuan Rd
Chagugang County,
Wuqing District
301721, Tiajin, P.R. China

Phone: +86 22 8862 9800
Fax: + 86 22 8862 9900

E-mail: airtech.asia@airtechasia.com.cn
Website: www.airtech.asia

Data Sheet

FLOWRUNNER KF160

Mesh wrapped spiral resin feed

DESCRIPTION


FlowRunner KF160 is a sewn tubular Knitflow 160 mesh with 1/2" (12 mm) or 3/4" (19 mm) spiral tube inserted for resin infusion applications.

TECHNICAL DATA

Material type	HDPE
Colour	Orange
Configuration of net	Knitted
Maximum use temperature	250°F (121°C)
Mesh weight	4.7 oz/yd^2 (160 g/m^2)

SIZES

Product	Spiral	Width	Length
FlowRunner KF160-12	1/2 inch (12 mm)	4 inches (100 mm)	82 feet (25 m)
FlowRunner KF160-19	3/4 inch (19 mm)	4 inches (100 mm)	82 feet (25 m)

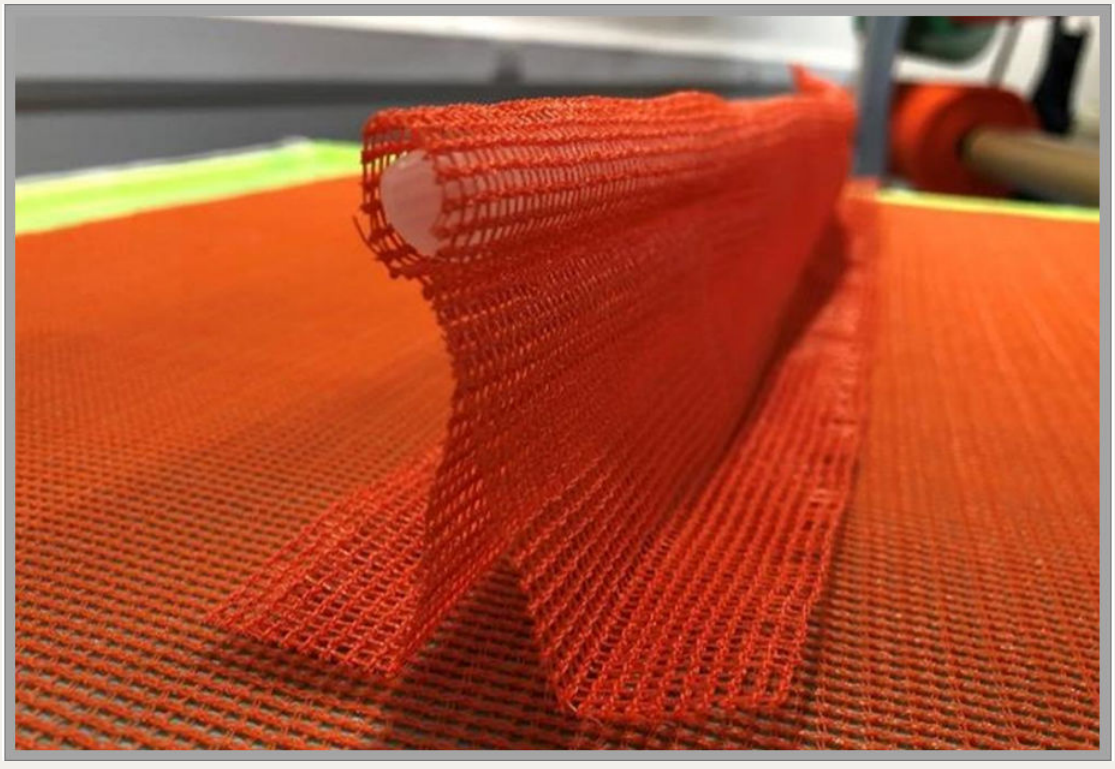

NOTES

- The FlowRunner KF160 is sold with spiral tube inserted.
- The maximum use temperature is dependent upon the duration at maximum temperature and is process specific, Airtech recommends testing prior to use.

Last updated : 2023-06-28

Catalog position : Resin infusion products

As the conditions or methods of use, including storage, are beyond our control, Airtech Asia does not assume any responsibility for the performance of this material for any particular use. The material is sold "as is". Airtech Asia disclaims, and buyer waives, any and all implied warranties, including without limitation the implied warranties of merchantability and of fitness for particular use. The information contained herein represents typical properties and should not be used for specification purposes. This translation is provided for your convenience only. The official language is Chinese and the official law is China.