AIRTECH EUROPE Sarl

ZI Haneboesch
L-4562 Differdange
LUXEMBOURG

Phone : +352 58 22 82 1
Fax : +352 58 49 35

E-mail : sales@airtech.lu
Website : www.airtech.lu

Data Sheet

AIRVAC 22

Venturi style vacuum source used with pressurized air lines

DESCRIPTION


The Airvac 22 is a venturi block with a self contained silencer that uses compressed shop air lines to create vacuum without the use of a vacuum pump. Airvac 22 will quietly draw up to -0,864 bar. The maximum vacuum is achieved at a positive air pressure of 5.5 bar. Going above or below this input pressure will decrease the Venturi vacuum potential.

BENEFITS

- Lowest cost vacuum source for workshops.
- Small and portable, the Airvac 22 can be easily carried in tool bags.
- Perfect solution for field repair work.

TECHNICAL DATA

Screw thread	1/4 inch male NPT (Vacuum) 1/8 inch female NPT (Air)
Assembly style	Screw down

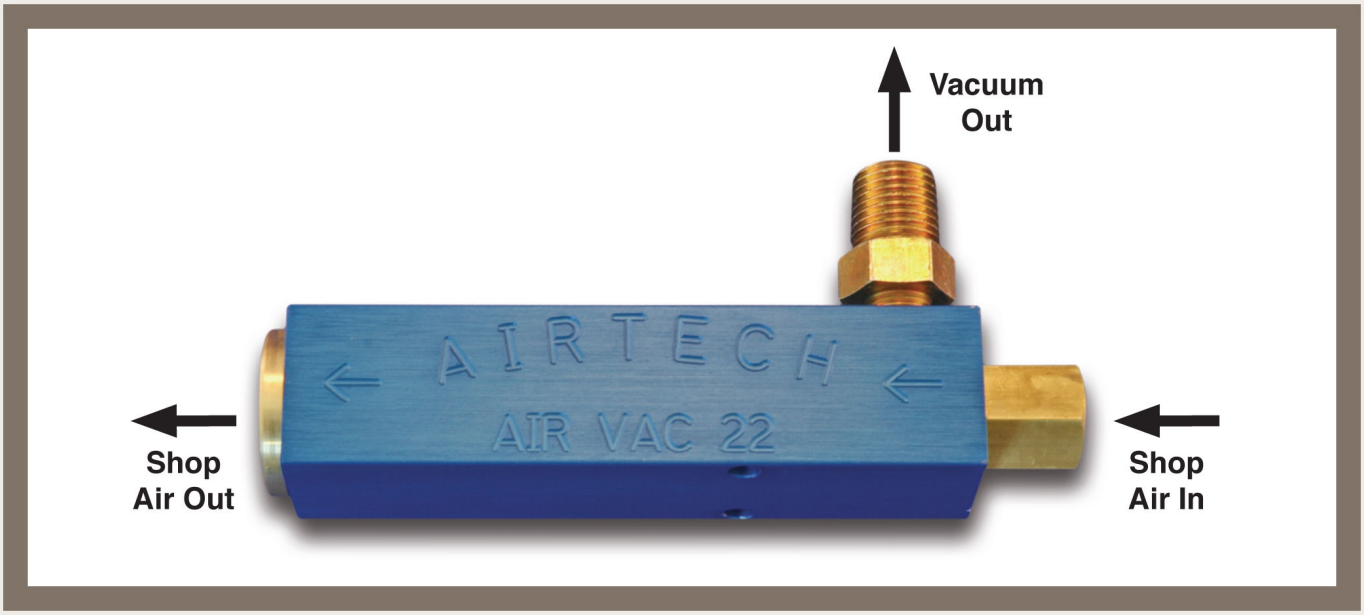

DIRECTIONS FOR USE

- Connect the Airvac 22 unit with your compressed air line in your shop.
- Adjust air in pressure at 5.5 bar.
- Connect vacuum line with AQD 500TF.

Last updated : 2015-11-05

Catalogue position : Vacuum valves and hoses

As the conditions or methods of use, including storage, are beyond our control, Airtech Europe does not assume any responsibility for the performance of this material for any particular use. The material is sold "as is". Airtech Europe disclaims, and buyer waives, any and all implied warranties, including without limitation the implied warranties of merchantability and of fitness for particular use. The information contained herein represents typical properties and should not be used for specification purposes. This translation is provided for your convenience only. The official language is English and the official law is Luxembourg.